



WASTE SERVICING

It is recommended that the waste tank be emptied every time the cabin temperature is expected to decrease below the freezing point.

The waste tank, after drained and rinsed, shall be replenished with clean water and a germicidal deodorant.

WASTE SERVICING PROCEDURE

- Toilet Flush-RHCBP (SHED BUS) CBOPEN
Put a tag on the CB.
- Toilet Front CoverREMOVE
The door is attached to the toilet shroud box by a lanyard.
- Manual Closure Valve.....CLOSE
Push the manual closure valve to close it.
- Electrical Connector.....DISCONNECT
Put a protective cap on it.
- Flush Hose.....DISCONNECT
Loosen and remove the clamp from the flush hose and disconnect it from the hydraulic connection.
- Hydraulic CapDISENGAGE
Disengage the hydraulic protective cap and put it on the hydraulic connection. Put the clamp on the hydraulic protective cap and lock it.
- Waste Tank LatchesOPEN
Unlatch the waste tank.
- Waste Tank.....REMOVE
Remove the waste tank by the tank handle.
- Waste Tank CapOPEN
- Waste Tank ContentDRAIN
Empty the waste tank into a disposal facility.
- Waste Tank.....CLEAN/RINSE
Fill the waste tank with 5 l of water. Close the cap. Pivot and shake the waste tank to rinse all internal surfaces for a minimum of 1 minute.



NOTE: If it is necessary to store the empty waste tank, keep it in an environment where the temperature is higher than 10°C (50°F). This is to make the next servicing of the waste tank easier.

Fluid SERVICE
Fill the waste tank with the precharge solution through the cap.

NOTE: The solution must be prepared with 3.8 ℓ of water in a separate container and 125 ml of URBAKTOL AF, or 3.55 ℓ of water and 70 ml of the germicide deodorant DEJET.

Waste Tank Cap CLOSE

Waste Tank ENGAGE
Engage the waste tank into the toilet.

Hydraulic Cap..... REMOVE
Remove the clamp from the hydraulic protective cap and remove the hydraulic protective cap from the hydraulic connection. Engage the hydraulic cap to the support.

Flush Hose ENGAGE
Engage the flush hose to the hydraulic connection and install the clamp.

Electrical Connector CONNECT
Remove the protective cap from the electrical connection and connect it.


Waste Tank Latches LATCH
Engage the waste tank to the toilet.

Manual Closure Valve OPEN
Make sure that the manual closure valve is totally open to prevent leakage.

Toilet Front Cover INSTALL

Toilet Flush-RHCBP (SHED BUS) CB..... CLOSE
Remove the CB tag.

Toilet Flush..... TEST
Flush the toilet three times to check its operation.

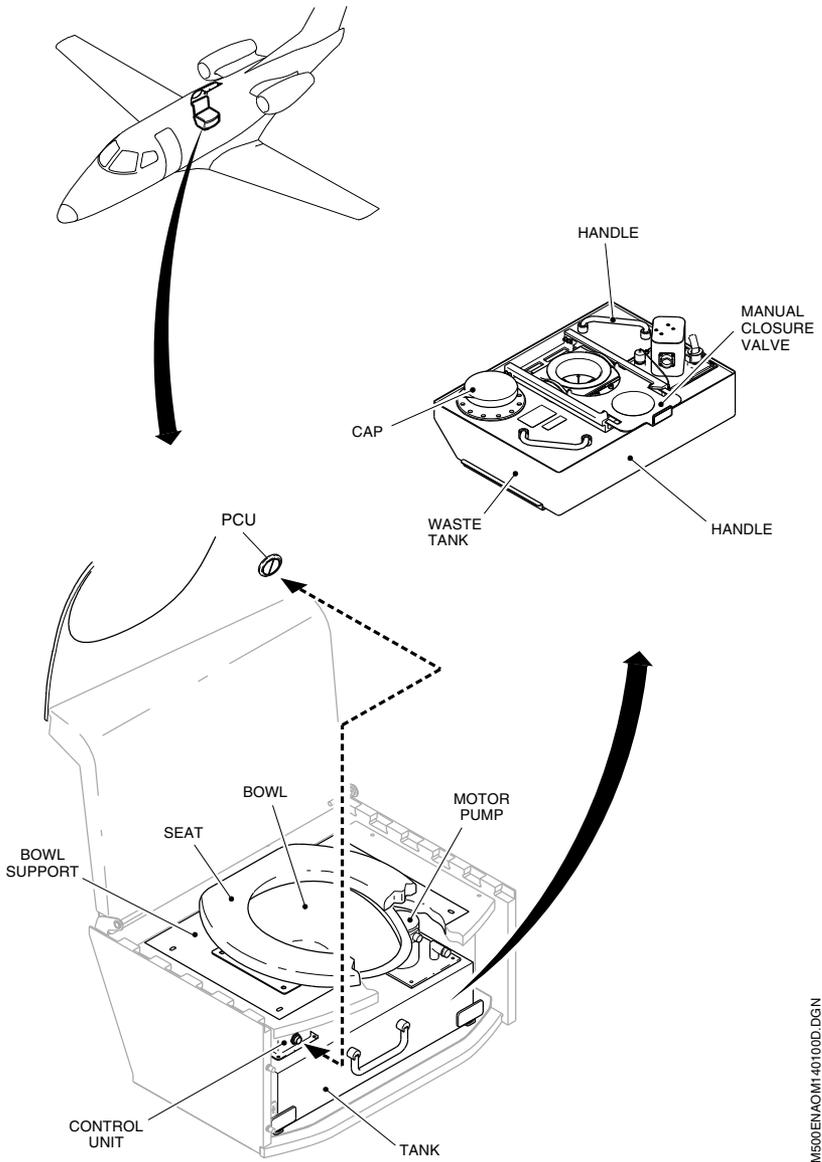

EM560ENAOM140100D.DGN

RECIRCULATING TOILET ASSEMBLY

POH-2761

5-45

REVISION 11

code 01

Page 3